



金属壳体55系列 (3-8芯)




55A1-1508



5507-1500




5501-1508-0002

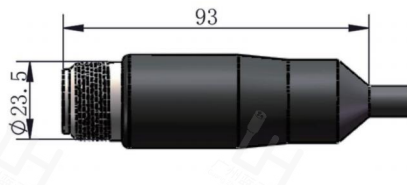


5502-1508-0002




5501-1508-0000

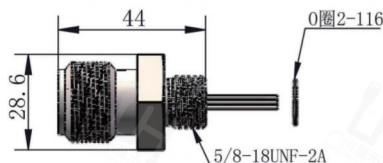



5507-1508-0001

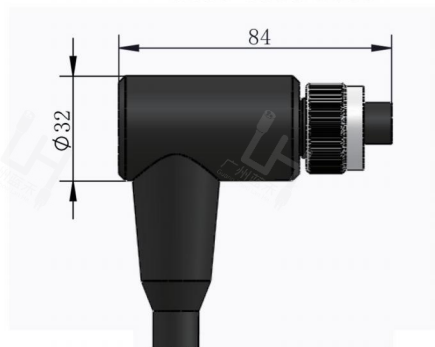

55R1-1508-0002

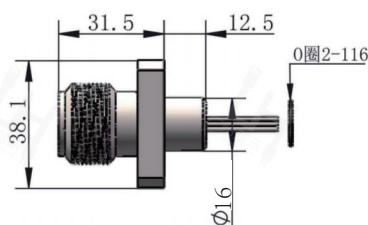

5506-1508-0001



BCR Face View



5502-1508-0000



5501-1508-0000

参数:

芯数: 3、4、6、8芯

插头、插座芯线规格:

3-6芯1平, 8芯0.5平

电气参数: 300V@3-10Amp

接触电阻: <0.01Ω

绝缘电阻: >200 MΩ

插拔次数: >500次

工作温度: -4° ~ +60° C

工作深度: 6000米

插座、插头芯线颜色:

1黑 2白 3红 4绿 5桔 6蓝

7白/黑 (紫) 8红/黑 (棕)

插座芯线颜色:

白色 (数字标签)

部件材料:

接插件主体: 氯丁橡胶

插座主体: 316不锈钢/钛合金

针芯: 镀金铜

螺母和垫片: 不锈钢

‘O’ 型圈: 丁腈

锁紧盖: 不锈钢

尺寸单位: 毫米

螺纹单位: 英寸

1英寸=25.4毫米

以下可根据要求定制:

1 缆长

2 外壳材料: 不锈钢、钛

3 螺杆长度